


Interconnect Loose Tube

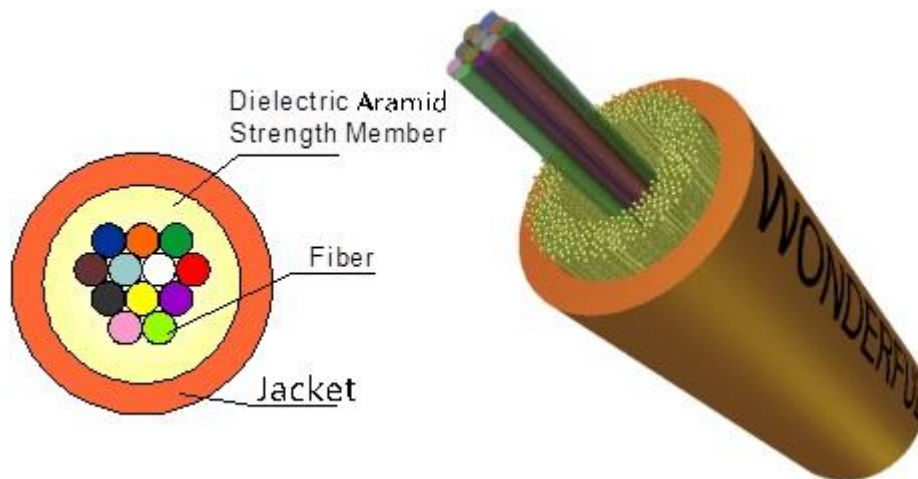

DESCRIPTION

Applications

- Indoor use.
- Suitable for pigtails, patch cords and interconnection between optical instruments.
- Suitable for standard single ferrule mechanical connectors (LC, SC, ST, etc.) via a furcation kit.
- IEEE 802.3z 10GBase, 40GBase, 100GBase Ethernet and legacy speeds.
- FDDI / ATM

Features

- High performance of bending insensitive.
- More easier for installation as package in REELEX II carton.
- Fitting various requirements from clients.

Specifications

Fiber Core Count	2	4	6	8	12
Fiber Core Color	As Standard				
Jacket Material / Flame Retardant	PVC / OFN FRPVC / OFNR FRLSPVC / OFNP LSZH / IEC 60332-1-2 LSFRZH / IEC 60332-3-24				
Jacket Color	Standard Colors or Client's Request.				
Jacket Diameter (mm)	3.0				
Jacket Thickness (mm)	0.70				
Cable Weight (Kg/Km)	8	8	8	8	8
Tensile Loading (Short Term)	150 N				
Tensile Loading (Long Term)	80 N				
Crush Load (Short Term)	500 N/100mm				
Crush Load (Long Term)	100 N/100mm				
Bend Radius (Short Term)	20 Times of Cable Diameter				
Bend Radius (Long Term)	10 Times of Cable Diameter				

Customization

- **Fiber Type:** G.652.D 、 G.657.A1 、 G.657.A2 、 OM2 、 OM3 、 OM4
- **Dimension:** As specification or per client's request.
- **Delivery Length:** 1km, 2km or per client's request.