




C01ADAS000

PVC 0.85 SQMM, -40°C to 105°C

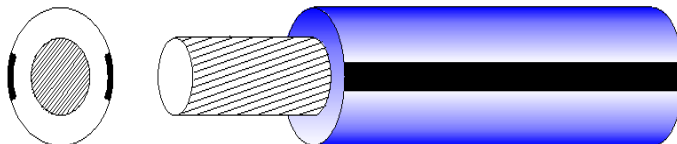

CONSTRUCTION

Conductors	19/0.240 stranded bare annealed copper
Insulation	Lead Free PVC
Color Code	Per customer's request
Binder	N/A
Shielded	N/A
Drain wire	N/A
Ripcord	N/A
Jacket	N/A

Marking

PVC CABLE 0.85 SQMM WONDERFUL (LF)

Note 1: For OEM Project, marking based on customer request.

Packaging

1000M: Coil

ELECTRICAL CHARACTERISTICS

DC Resistance Ohms/km @ 20°C (Max.)	21.7
Insulation Resistance Mega Ohm.Km at 20°C (Min.)	5
Dielectric Strength (Under water)	1000V
Spark Test KV for 0.15 seconds (No Broken)	3.0

PHYSICAL CHARACTERISTICS

Nominal Cable Diameter (mm)	2.40
Cable Cold Bend	-40±1°C x 1 Hrs
Heat Resistance Test	136±1°C x 1 Hrs
Temperature Rating (°C)	-40°C to 105°C
Temperature Voltage (V)	300