



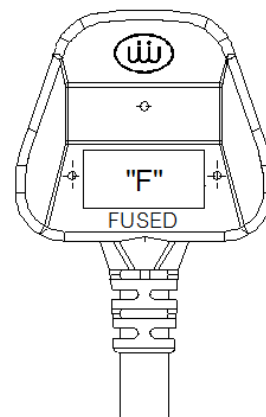

PLUG WP-13A

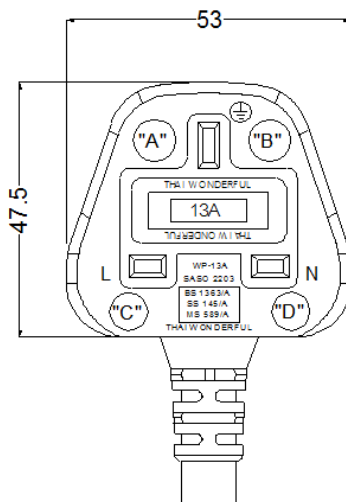

STANDARD

BS 1363-1 : 1995 with A1 , A2 And A3/SS 145 : Part 1 : 1997 / MS 589 : Part 1 : 1997 Intertek Type Certificate Number : CN-GSOG-2016956R2 BS 1363-1 : 2016+A1 : 2018 SASO 2203 : 2018	
Safety Mark	WP-13A SASO , ASTA , SAFETY
Logo of safety mark	
Rate Current & Voltage Mark	13A 250V
Attached wire cord	H03VVH2-F 2G 0.75SQMM H05VV-F 3G 0.75SQMM , 1.00SQMM , 1.50SQMM H05V2V2-F 3G 0.75SQMM , 1.00SQMM , 1.50SQMM

ELECTRICAL CHARACTERISTICS

<b>Insulation Resistance</b> 100 MEFA Ohm / 500V DC, 1 Min	N/A
<b>ACCELERATED AGING</b> NO CRACK 100°C , 96 RHS	N/A
<b>DIELECTRIC VOLTAGE TEST</b> No Broken AC 3.0 Kv / 1 min aC 3000V / 1.0 mA / 1 min	N/A

PHYSICAL CHARACTERISTICS

Nominal Cable Diameter (mm)	4.38
Cable Cold Bend	-20±1°C x 4 Hrs
Minimum Bend Radius	15 times O.D.
Temperature Rating (°C)	20°C to 75°C
Temperature Voltage (V)	300

Packing : CARTON