




## PLUG WP-206

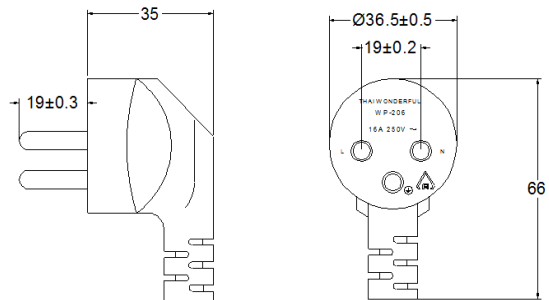

### STANDARD

Israel Standard SI 32 Identical to the international standard IEC60884-1 Third edition : 2002 : 6	
Safety Mark	ISRAEL SI32
Logo of safety mark	
Rate Current & Voltage Mark	16A 250V
Attached wire cord	H05VV-F 3G 0.75SQMM H05VV-F 3G 1.00SQMM H05VV-F 3G 1.50SQMM

Packing : CARTON

### ELECTRICAL CHARACTERISTICS

<b>Resistance to Heat</b> 100±2°C , 1 HR	N/A
<b>Compression Test</b> 80±2°C , 1 HR , 20N (2Kgs)	N/A
<b>Insulation Resistance</b> 100 MEFA Ohm / 500V DC, 1 Min	N/A
<b>Withstanding Voltage Test</b> 2000C / 1Min , 1.00 mA	N/A
<b>Test Pressure Plug</b> The Plug put Oven test 23±2°C 300N / 1Min	N/A.
<b>Glow Wire Test</b> The test made at a temperature of 750°C,30 Min	N/A.

### PHYSICAL CHARACTERISTICS

Nominal Cable Diameter (mm)	4.38
Cable Cold Bend	-20±1°C x 4 Hrs
Minimum Bend Radius	15 times O.D.
Temperature Rating (°C)	20°C to 75°C
Temperature Voltage (V)	300