



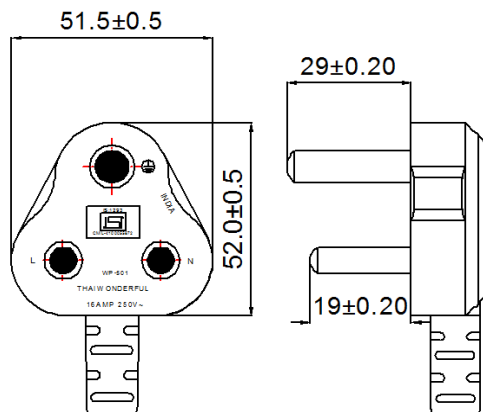

PLUG WP-501



STANDARD

SOUTH AFRICA SANS 164-1 , SANS 164-3 Based on BS546	
Safety Mark	WP-501 IS:1293
Logo of safety mark	
Rate Current & Voltage Mark	16A 250V
Attached wire cord	POWER CABLE 3G 1.00SQMM , 1.50SQMM

ELECTRICAL CHARACTERISTICS

ACCELERATED AGING 70±2°C , 168 HR	N/A
WITHSTANDING VOLTAGE TEST AC 3.0KV/1min. / AC 3000V / 100mA / 1 min	N/A
Insulation Resistance 500V DC, 1 Min > 5Mohm	N/A
TUMBLING BARREL TEST TOTAL NUMBER OF FALL = 1,000	N/A

PHYSICAL CHARACTERISTICS

Nominal Cable Diameter (mm)	4.38
Cable Cold Bend	-20±1°C x 4 Hrs
Minimum Bend Radius	15 times O.D.
Temperature Rating (°C)	20°C to 75°C
Temperature Voltage (V)	300

Packing : CARTON