


Hybrid Adaptor

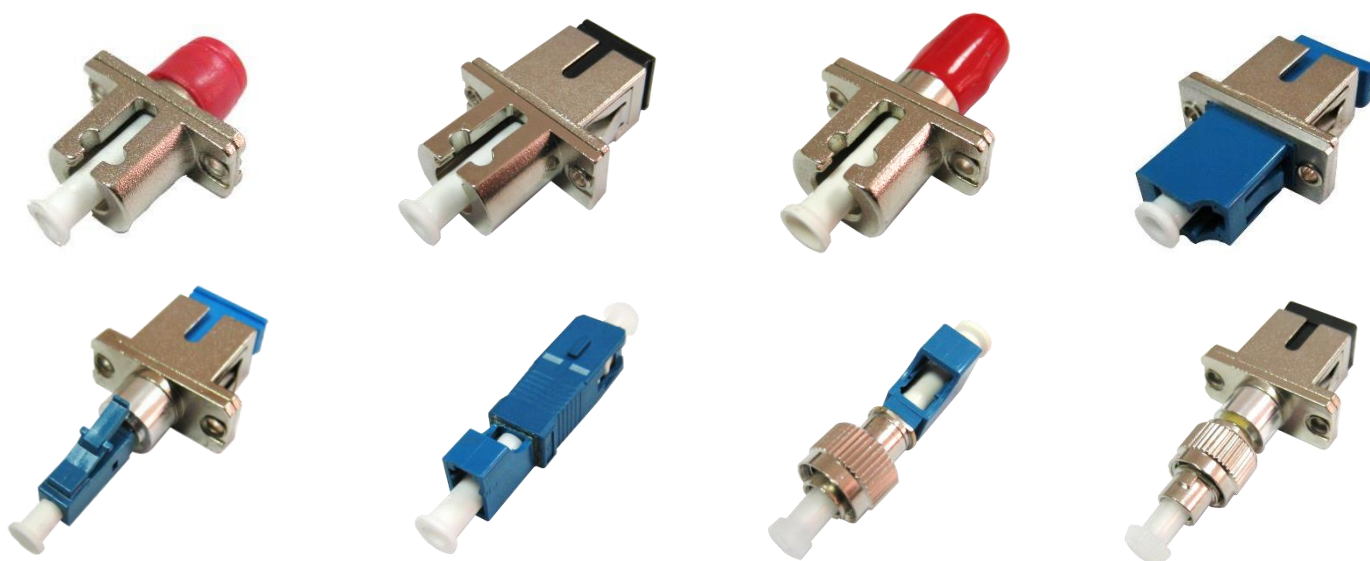

DESCRIPTION

Applications

- CATV Network
- Telecom Network
- FTTH and FTTx
- Fiber Optical Distribution Frame
- Data Processing Networks

Features

- Low Insertion Loss Value
- Compliant with Telcordia GR-326-Core, IEC, TIA
- Excellent Concentricity
- Good Changeability and Repeatability
- High Precision of Mechanical Dimensions

Specifications

Item	Value
Insertion Loss	≤ 0.20dB
Insert-pull Test	1000 times
Tensile Strength	≥ 10Kg
Operating Temperature	-40°C~+85°C
Material	Nickel, Ceramic, Metal

ORDER INFORMATION

AD-①①①①-②-③④-⑤-⑥-⑦-X

① Assembly Type		② Fiber Core	③ Fiber Type	④ Connector Finish	⑤ Sleeve	⑥ Type	⑦ Color
SC=SC	SC=SC	Simplex=S	SM=SM	APC=A	Ceramic=C	Flange=F	Beige(MM)=BG
ST=ST	ST=ST	Duplex=D	MM=MM	PC=P	Nickel=N	Flangeless=N	Aqua(OM3)=AQ
FC=FC	FC=FC	Quad=Q		UPC=U	P.B=P	Square=S	Blue(SM)=BU
LC=LC	LC=LC					D Type=D	Green(APC)=GR
MTRJ=MT	MTRJ=MT						Metal=MT
MPO=MP	MPO=MP						Purple(OM4)=PL