



Configuration panel

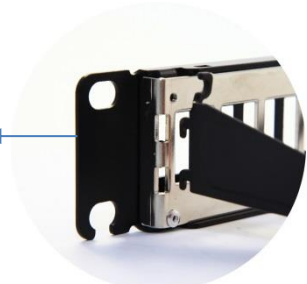

Easy to install cable management

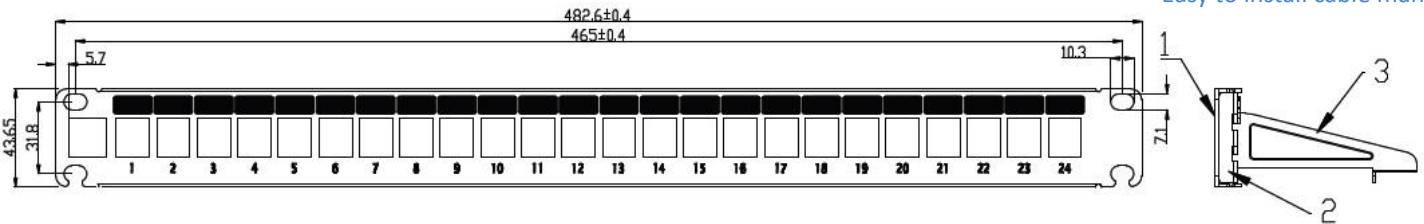

DESCRIPTION

Applications

- Media Panel assembly
- High density system

Features

- 24 available port in one unit
- Staggered design
- Mount to standard EIA 19" racks
- FTP design to reducing NEXT

Specifications

Item	Value
Operating temperature range	-10 ° C TO 60 ° C
Storage temperature range	-40 ° C~+68 ° C
Humidity	10%~90%RH

ORDER INFORMATION

PP- - - - - - - -

① ② ③ ④ ⑤ ⑥ ⑦

① Assembly Type		② Isolation Type	③ Available Port	④ Unit Type	⑤ Material	⑥ Cable Management	⑦ color
CAT3=C3	CAT6=C6	U:UTP	12:12Port	01:1U	S:Iron	W:With	BK
CAT5=C5	CATA=6A		24:24 Port	02:2U	A: Aluminum	N:Non	SR
CAT5E=5E		F:FTP	48:48 Port		P:Plastic		