


Modular Patch Panel Cat 6 & 5e



Easy to install cable management

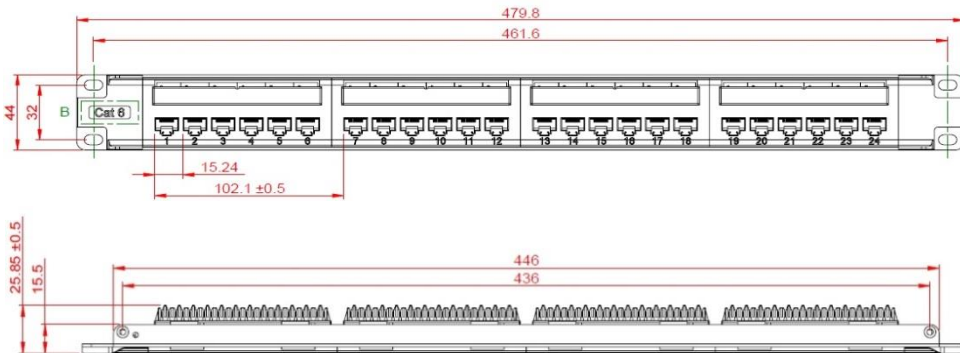

DESCRIPTION

Applications

- Fit standard 19" rack mount widths
- Design for Cat5e & CAT6 Cabling system
-

Features

- IDC connector provides vertical termination for 23-26 AWG
- Contacts are phosphor bronze plated with 50 micro inches hard gold
- 24 available port in one unit

Specifications

Item	Value
Operating temperature range	-10 °C TO 60 °C
Storage temperature range	-40 °C ~ +68 °C
Plastic Frame	ABS UL94V-0
Insertion life	>750 times
IDC Plastic	PC UL94V-2
DC resistance	Max 0.1ohm
Temperature Range	-40 °C ~ +68 °C

ORDER INFORMATION

PP- - - - - - - -

① ② ③ ④ ⑤ ⑥ ⑦

① Assembly Type		② Isolation Type	③ Available Port	④ Unit Type	⑤ Material	⑥ Cable Management	⑦ color
CAT3=C3	CAT6=C6	U:UTP	12:12Port	01:1U	P:Plastic	W:With	BK
CAT5=C5			24:24 Port	02:2U		N:Non	
CAT5E=5E							