





# Category 6 & 5e UTP

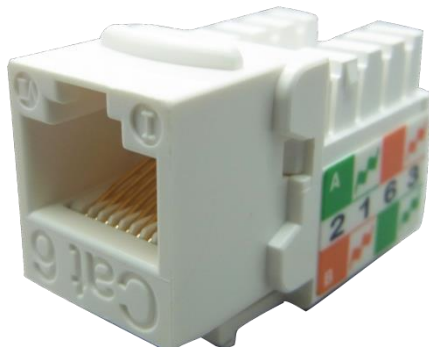

## DESCRIPTION

### Applications

- ATM 155/622Mbps
- 10 Gigabit Ethernet compliant for Channel Class E.
- transmission requirements up to 250 MHz
- 550 MHz Broadband

### Features

- Contacts are phosphor bronze plated with 50 micro inches hard gold
- IDC connector provides vertical termination for 22-26 AWG
- 500 times Re-Punch lifetime IDC
- Fireproof PC IDC cap

### Specifications

Item	Value
Jack Insertion life	10000 times
Contact resistance	20m ohm
Housing material	Fire-resistant ABS
DC resistance	Max 0.1ohm
Temperature Range	-40°C ~ +70°C

## ORDER INFORMATION

K J-  -  -  -  -  -    
 ① ② ③ ④ ⑤ ⑥

① Assembly Type		② Isolation Type	③ Angle Type	④ IDC Type	⑤ Shutter Type	⑥ color	
CAT3=C3	CAT5E=5E	U:UTP	H8: 90° 8P8C	J:RJ45		WH	RD
CAT5=C5	CAT6=C6	F:FTP	V8:180°8P8C	T:Tool-less		BK	YE
			T6: 90° 6P6C			BU	
			T4: 90° 6P4C				
			T2: 90° 6P2C				