



# Surface Mount Box

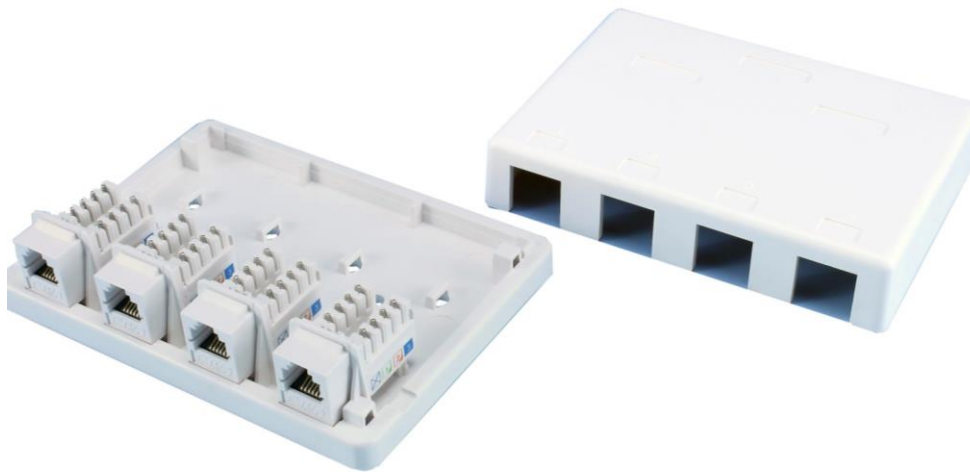

1 &amp; 2 &amp; 4 &amp; 6 Port Surface

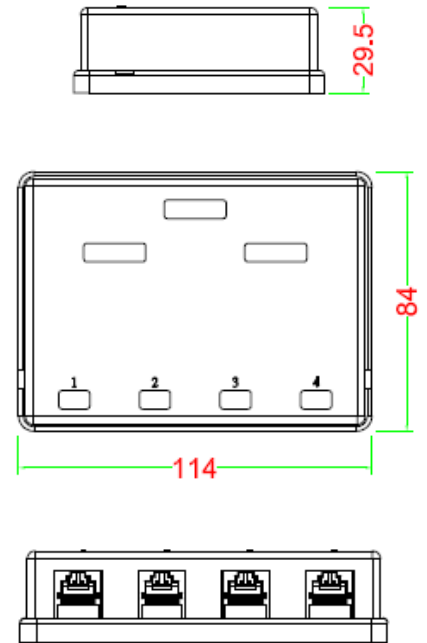

(mm)

## DESCRIPTION

### Applications

- Snap in module for different Configuration of jack and connectors

### Features

- 1 & 2 & 4 & 6 studs for cable tie fastening

### Specifications

| Item              | Value                              |
|-------------------|------------------------------------|
| Body Materials    | Fireproof ABS UL-94V0              |
| Offer Options     | 1 & 2 & 4 & 6 Port snap-in modules |
| Temperature Range | -40°C ~ +70°C                      |

## ORDER INFORMATION

W-MB-○-○-N-○-○○-○○  
 ① ② ③ ④ ⑤

| ①Application Type | ②Material | ③Shutter       | ④Available Port | ⑤color   |
|-------------------|-----------|----------------|-----------------|----------|
| I : Industry      | A:ABS     | U:No shutter   | 01: 1 Port      | WH:WHITE |
| C: common         | P:PC      | S:with shutter | 02: 2 Port      |          |
| M:Media           |           |                | 04: 4 Port      |          |
|                   |           |                | 06: 6 Port      |          |