



# Configuration panel

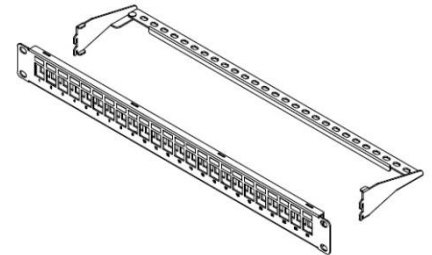

Easy to install cable management

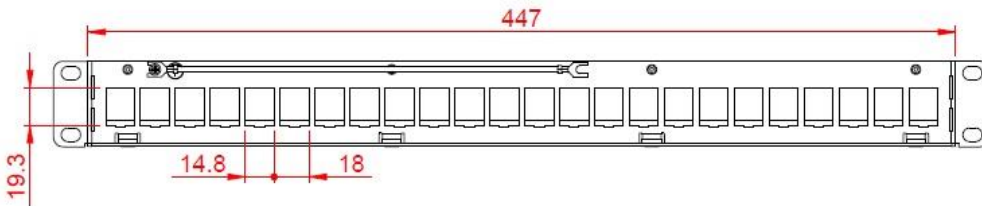

## DESCRIPTION

### Applications

- Media Panel assembly
- High density system

### Features

- 24 available port in one unit
- UTP/FTP wiring system
- Mount to standard EIA 19" racks
- FTP design to reducing NEXT

### Specifications

Item	Value
Operating temperature range	-10 °C TO 60 °C
Storage temperature range	-40 °C~+68 °C
Humidity	10%~90%RH

## ORDER INFORMATION

PP-○○-○-○○-○○-○-○-○○  
 ① ② ③ ④ ⑤ ⑥ ⑦

① Assembly Type		② Isolation Type	③ Available Port	④ Unit Type	⑤ Material	⑥ Cable Management	⑦ color
CAT3=C3	CAT6=C6	U:UTP	12:12Port	01:1U	S:Iron	W:With	BK
CAT5=C5	CATA=6A	S:STP	24:24 Port	02:2U		N:Non	SR
CAT5E=5E		F:FTP	48:48 Port				
		D:DIE					