

# LC MM Fiber Optic Patch cord



## DESCRIPTION

### Applications

- CATV System
- Telecom Network
- FTTH and FTTx
- Fiber Optic Device
- Local Area Network

### Features

- Low Insertion Loss Value
- Compliant with Telcordia GR-326-Core,IEC,TIA
- According to customer requirement
- Various connector type available
- High Stability & Reliability

### Specifications


Item	Value
Core Diameter	62.5/125,50/125μm
Outer jacket material	PVC / LSZH
Insertion Loss	≤ 0.3dB
Return Loss	≥ 30dB
Repeatability	≤ 0.1dB
Durability	≤ 0.2dB, 1000 Matings
Tension repellence	7KG
Operating temperature	-40°C to 75°C
Storage temperature	-55°C to 85°C

## ORDER INFORMATION

FP-①-②-③④⑤-⑥-⑦-⑧-⑧


① Fiber Type	② Connector Type		③ Connector Finish	④ Jacket Type	⑤ Fiber Core	⑥ Cable Diameter	⑦ Jacket Color	⑧ Length
MM OM2=M2 MM OM3=M3 MM OM4=M4	LC=LC	LC=LC	UPC=U	OFN=N OFNG=G OFNR=R OFNP=P LSZH=L PE=E	Simplex=S Duplex=D	0.9mm=09 1.6mm=16 2.0mm=20 3.0mm=30	Orange=OR Yellow=YE Aqua=AQ	01-99m

REV	DESCRIPTION	DATE
A	NEW RELEASE	2013.04.30

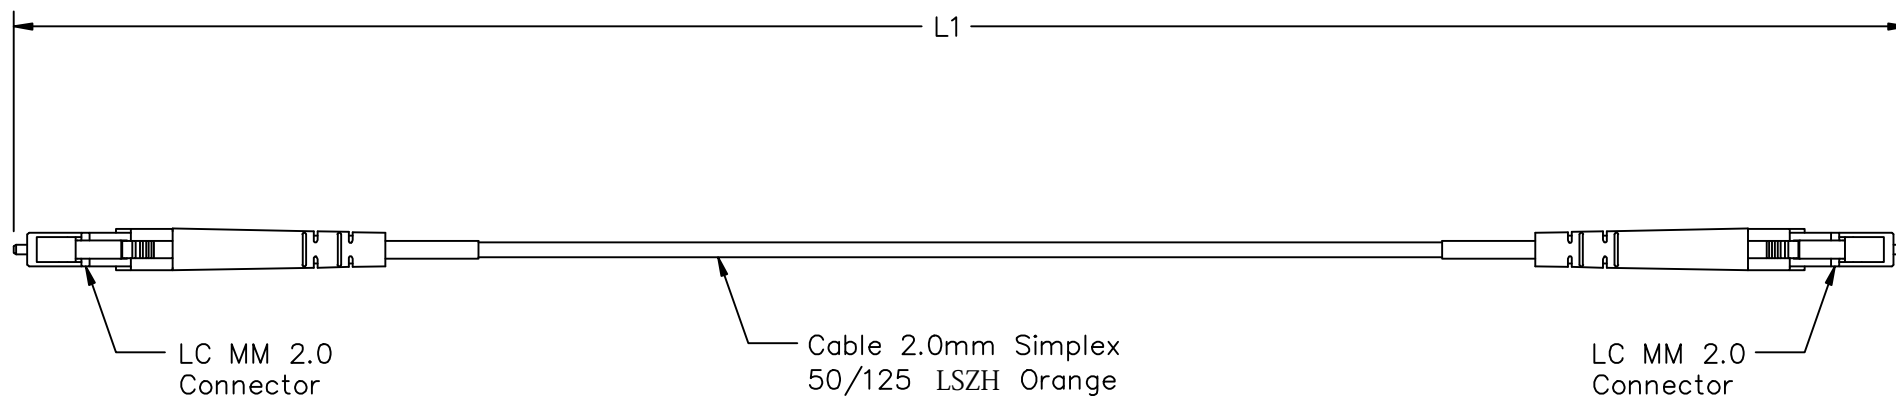


Note:

1. Insertion Loss < 0.3dB
2. Durability: 500 matings
3. Operating Temperature: -40°C~+75°C


REV.	A	 <b>WONDERFUL HI-TECH CO., LTD.</b>
MATERIAL		
SCALE	-	<b>PRODUCT DESCRIPTION</b> LC-LC 50/125 Simplex 2.0mm LSZH Orange L Meter
DRAWN	Augustine	<b>DRAWING TITLE</b> Simplex Patchcord
APPROVED	Niels	<b>DRAWING NO.</b>

REV	DESCRIPTION	DATE
A	NEW RELEASE	2013.04.30

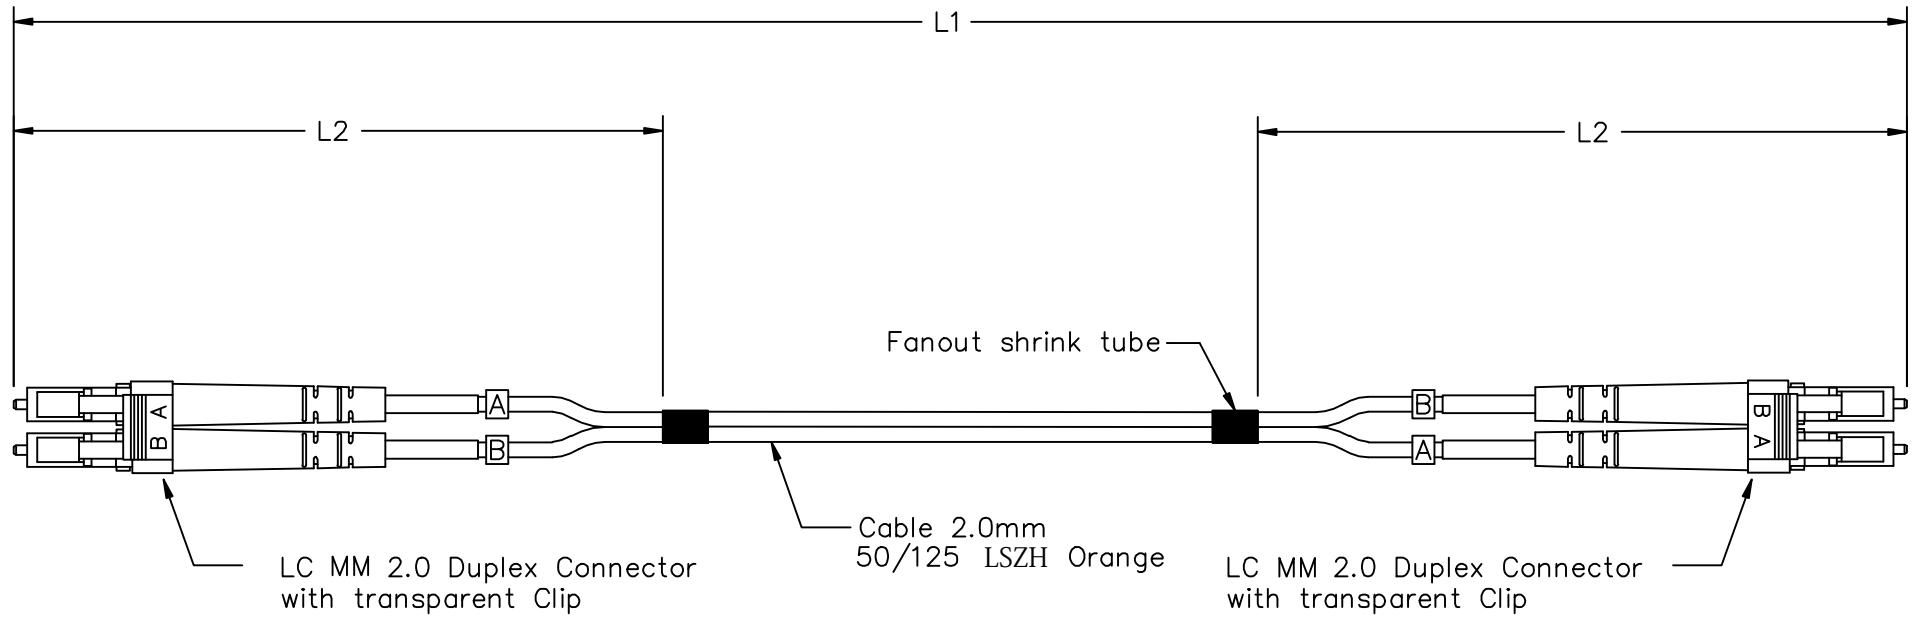

Note:

1. Insertion Loss < 0.3dB
2. Durability: 500 matings
3. Operating Temperature: -40°C~+75°C

		 WONDERFUL HI-TECH CO., LTD
REV.	A	PRODUCT DESCRIPTION LC-LC MM Duplex 2.0mm LSZH Orange L Meter
MATERIAL		
SCALE	-	DRAWING TITLE Duplex Patchcord
DRAWN	Augustine	
APPROVED	Niels	DRAWING NO.