
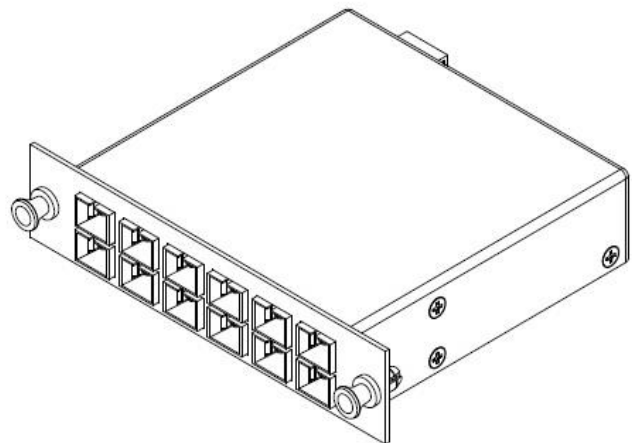


MPO Cassette

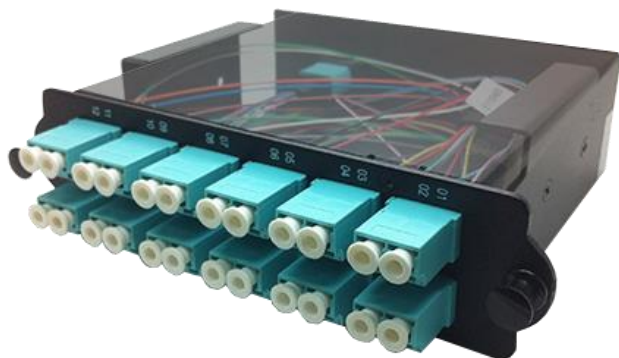

DESCRIPTION

Applications

- Data Centers
- Fiber Optic Network Infrastructure
- IDF/MDF with space constraints
- LAN & WAN Networks
- FTTX

Features

- High density
- Compact size
- Quick and easy installation
- Standard and customized made are available
- Available with 12 fiber and 24 fiber configurations for SC, LC connectors

Specifications

Item	Value	
Connector Type	MPO-LC cassette	MPO-SC cassette
Insertion Loss	< 1.30 dB	< 1.30 dB
Return Loss (Single mode)	≥ 55 dB	≥ 55 dB
Return Loss (Multimode)	≥ 20 dB	≥ 20 dB

ORDER INFORMATION

MPCS-①②-③④-⑤⑥-⑦⑧

① Fiber Type	② Fiber Core	③ Adaptor Type	④ Adaptor Core
SM=SM	12C=12	SC=SC	Simplex=S
MM OM2 =M2	24C=24	LC=LC	Duplex=D
MM OM3=M3			Quad=Q
MM OM4=M4			